


AMERICAN FLOOR PRODUCTS COMPANY, INC.

AFCO-USA

P.O. BOX 7055 • Gaithersburg, Maryland 20898 -7055 • 301-987-0490 • Fax 301-987-0422 email: sales@afco-usa.com• Web Site: www.afco-usa.com

CUSTOMER P.O.#

LAMINATED DOCK BUMPER® (LB-2240) Style B410-36

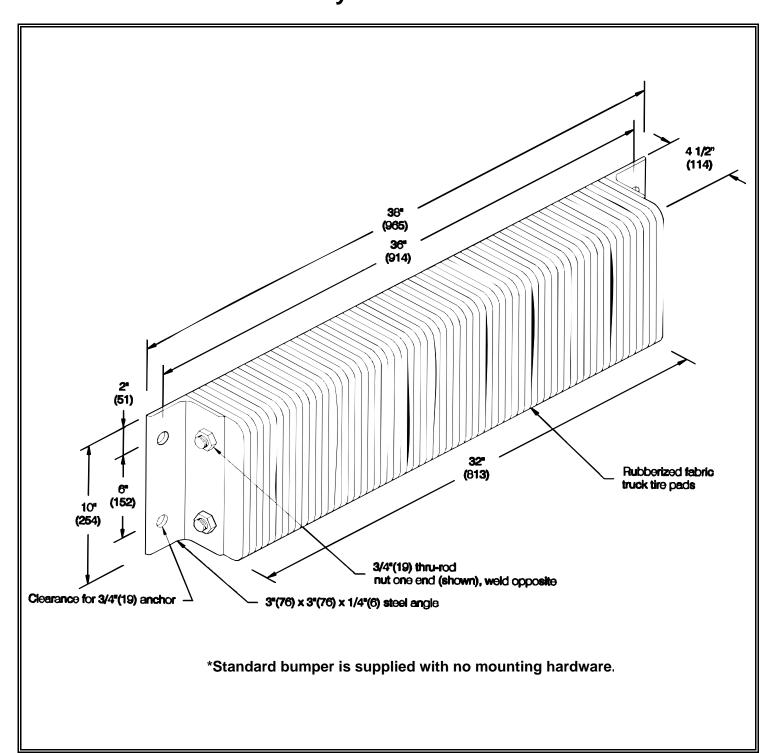

LAMINATED DOCK BUMPER® (LB-2240) Style B410-36

Profile	Application	Shock absorbing	Materials	Flammability & smoke developed (ASTM E-84)
Laminated	High abuse		Recycled truck tires Metal components	N/A

Features:	Finishes (metal components):	
Horizontal mounting	• Specify:	
• Weight:	Chrome aluminum lead-free enamel #107	
72 lbs.	or hot-dip galvanized #108	
Attractive deep black color enhances a		
professional architectural look	Suggested Mounting Hardware:	
Manufactured under pressure exceeding	Wedge anchor series:	
1,500 lbs. (680.40 kg) to absorb over 80% of impact.	Expansion anchor - for use in pre-drilled holes on existing concrete walls.	
·	J-Bolt series:	
Applications:	Cast-in-place anchor - for use in new	
High traffic commercial loading docks	concrete wall construction	
Rub rails along sides of truck wells		
Industrial plant wall protection		
·		

Bumper designs conform to OSHA, ANSI Life Safety, NFPA, BOCA, UBC, BOMA, ICBO, SBCCI, American Disabilities Act Accessibility Guidelines and all National Building /Code requirements.

JOB NAME:		ITEMS	QUANTITY
JOB NUMBER:		Dock Bumper:	
CONTRACTOR:		Galvanized:	Yes No
ARCHITECT:		Bolt Type:	
DEALER NAME:			
SIGNATURE:	Date:		