


## AMERICAN FLOOR PRODUCTS COMPANY, INC.

## AFCO-USA

P.O. BOX 7055 • Gaithersburg, Maryland 20898 -7055 • 301-987-0490 • Fax 301-987-0422 email: sales@afco-usa.com • Web Site: www.afco-usa.com

**CUSTOMER P.O.#** 

## LAMINATED DOCK BUMPER® (LB-2240) Style VB412-11

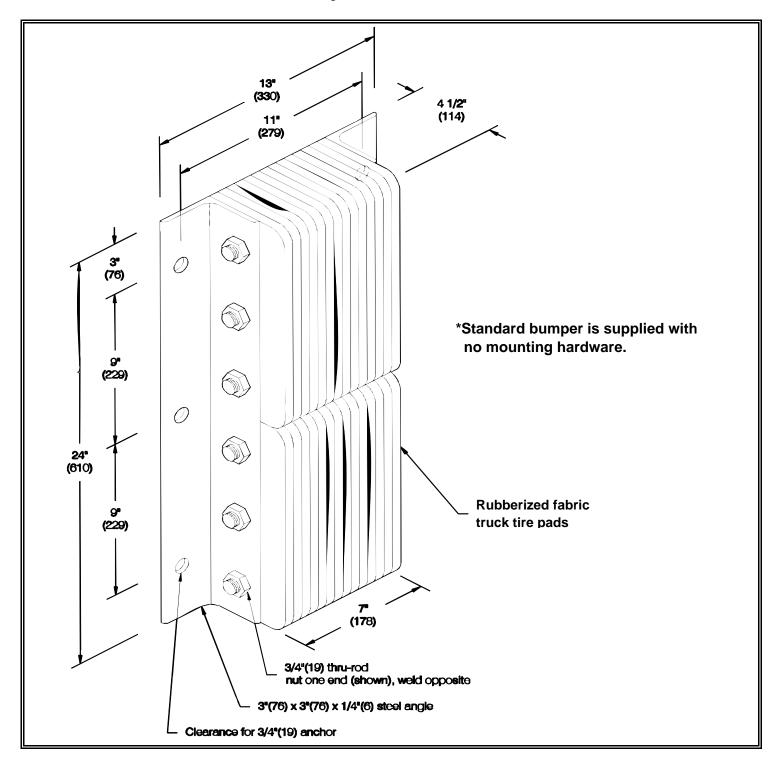

## LAMINATED DOCK BUMPER® (LB-2240) Style VB412-11

Profile	Application	Shock absorbing	Materials	Flammability & smoke developed (ASTM E-84)
Laminated	High abuse		Recycled truck tires Metal components	N/A

Features:	Finishes (metal components):
Horizontal mounting	• Specify:
• Weight:	Chrome aluminum lead-free enamel #107
56 lbs.	or hot-dip galvanized #108
Attractive deep black color enhances a	
professional architectural look	Suggested Mounting Hardware:
Manufactured under pressure exceeding	Wedge anchor series:
1,500 lbs. (680.40 kg) to absorb over 80% of impact.	Expansion anchor - for use in pre-drilled holes on existing concrete walls.
·	• J-Bolt series:
Applications:	Cast-in-place anchor - for use in new
High traffic commercial loading docks	concrete wall construction
<ul> <li>Rub rails along sides of truck wells</li> </ul>	
Industrial plant wall protection	

Bumper designs conform to OSHA, ANSI Life Safety, NFPA, BOCA, UBC, BOMA, ICBO, SBCCI, American Disabilities Act Accessibility Guidelines and all National Building /Code requirements.

JOB NAME:		ITEMS	QUANTITY
JOB NUMBER:		Dock Bumper:	
CONTRACTOR:		Galvanized:	Yes No
ARCHITECT:		Bolt Type:	
DEALER NAME:			
SIGNATURE:	Date:		