


## AMERICAN FLOOR PRODUCTS COMPANY, INC.

## AFCO-USA

P.O. BOX 7055 • Gaithersburg, Maryland 20898 -7055 • 301-987-0490 • Fax 301-987-0422 email: sales@afco-usa.com• Web Site: www.afco-usa.com

**CUSTOMER P.O. #** 

## RECYCLED PLASTIC SPEED BUMP® (SB-2302)

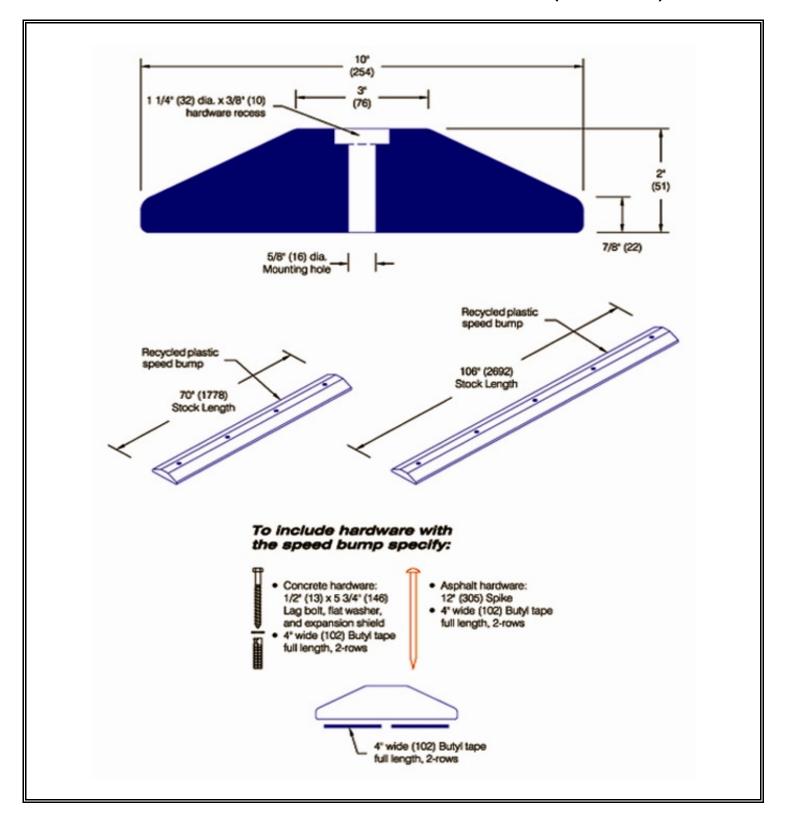

## RECYCLED PLASTIC SPEED BUMP® (SB-2302)

Profile	Application	Shock	ADA	Matorial	Flammability & smoke
FIOHE	Аррисации	absorbing	Compliance	Wiaterial	developed (ASTM E-84)
Sculpted	High abuse	25.4 ft.lbs/in.	N/A	Recycled	N/A
-		ASTM D-256		Plastic	

Features:	Installation Options:		
<ul> <li>Manufactured from 100% post-consumer,</li> </ul>	Suggested hardware		
post-industrial recycled plastic, to commercial	Concrete:		
tolerances.	1/2" x 5-3/4" (13 x 146 mm)		
Weight:	Lok Bolt and expansion shield		
5 lbs./ lin. ft.	Asphalt:		
Stock length:	12" (305 mm) Ground spike		
70" (1778 mm)	<ul> <li>Butyl tape provided for both installations</li> </ul>		
106" (2692 mm)			
,	Standard Color:		
	(70)Safety Yellow		
	(10)0000000		

Bumper designs conform to OSHA, ANSI Life Safety, NFPA, BOCA, UBC, BOMA, ICBO, SBCCI, American Disabilities Act Accessibility Guidelines and all National Building /Code requirements.

JOB NAME:		ITEMS	QUANTITY
JOB NUMBER:		Bump Length:	
CONTRACTOR:		Type of Surface:	
ARCHITECT:			I
DEALER NAME:			
SIGNATURE:	Date:		