


AMERICAN FLOOR PRODUCTS COMPANY, INC.

AFCO-USA

P.O. BOX 7055 • Gaithersburg, Maryland 20898 -7055 • 301-987-0490 • Fax 301-987-0422 email: sales@afco-usa.com• Web Site: www.afco-usa.com

CUSTOMER P.O. #

STEP-CHOCK® (WC-2381)

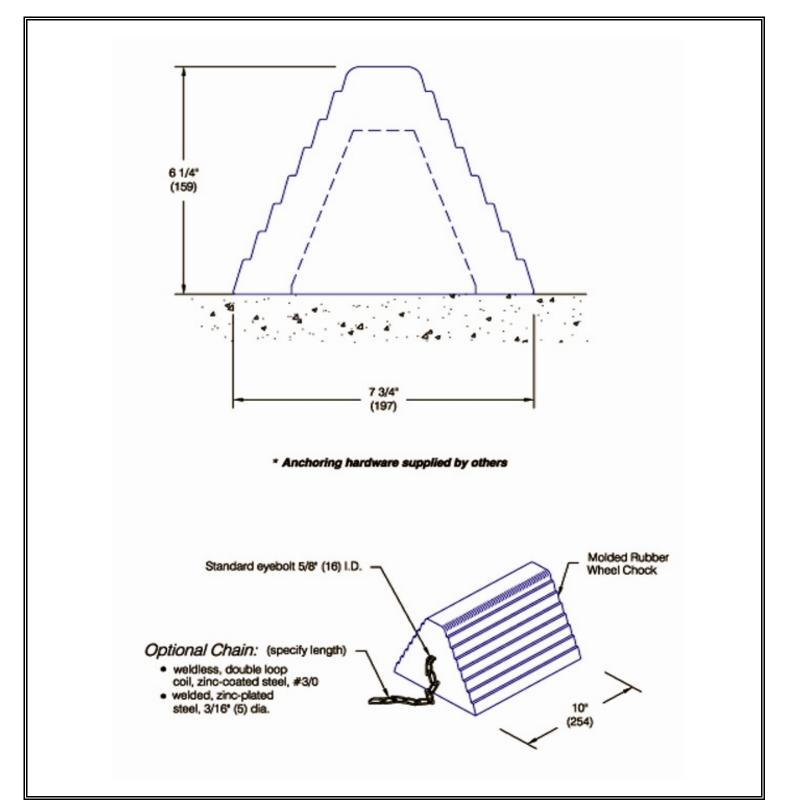

STEP-CHOCK® (WC-2381)

Profile	Application	Shock	ADA	Material	Flammability & smoke
1 I Orne	Аррисаціон	absorbing	Compliance	Material	developed (ASTM E-84)
Sculpted	High abuse	25.4 ft.lbs/in.	N/A	Nylon-reinforced	N/A
		ASTM D-256		rubber compound	

Features:	Applications:	
Molded from nylon-reinforced rubber compound	 For use with heavy truck/trailers and 	
Economical and long wearing	road equipment	
 Will not harm soft macadam and blacktop 		
driveways	Standard Color:	
Weight:	(1)Black	
9 lbs.		

Bumper designs conform to OSHA, ANSI Life Safety, NFPA, BOCA, UBC, BOMA, ICBO, SBCCI, American Disabilities Act Accessibility Guidelines and all National Building /Code requirements.

JOB NAME:		ITEMS	QUANTITY
JOB NUMBER:		Wheel Chock Length:	
CONTRACTOR:		Chain: (Optional)	
		Specify Length	
ARCHITECT:		Eyebolt: (Optional)	
DEALER NAME:			I
SIGNATURE:	Date:		