


AMERICAN FLOOR PRODUCTS COMPANY, INC.

CUSTOMER P.O. #

AFCO-USA

P.O. BOX 7055 • Gaithersburg, Maryland 20898 -7055 • 301-987-0490 • Fax 301-987-0422 email: sales@afco-usa.com • Web Site: www.afco-usa.com

SPACE[®] 2-1/2" x 135° The Invisible Corner Guard (CG-2145)

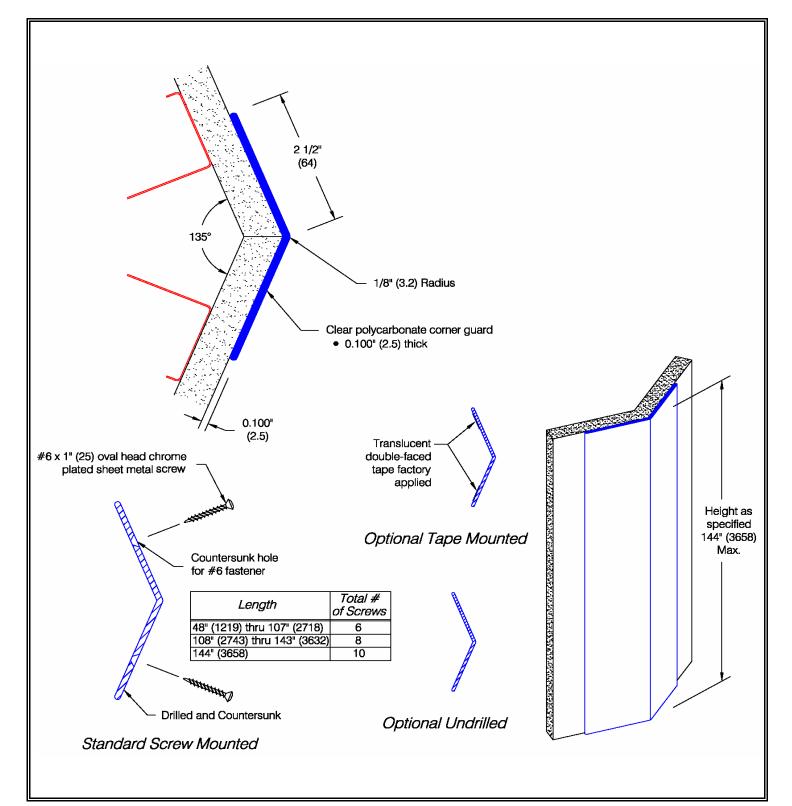

SPACE[®] 2-1/2" x 135° The Invisible Corner Guard (CG-2145)

Mounting	Application	Shock absorbing	Construction	Materials	Fire rating
Surface	High abuse	25.4 ft.lbs/in.	New and	Extruded lexan [®]	Class A
		ASTM D-256	renovation	Polycarbonate	

Testing in accordance with NFPA 255 (ASTM E 84):Class AFlame Spread Index: 5Smoke Developed Index: 185

Features:	Finishes:	Mounting Options:
 Extruded Polycarbonate 	Clear #132 smooth finish	 Double-faced tape
U/L 94 Flammability		 Undrilled (fastening method by
V-2 @ 0.125		others)
V-2 @ 0.0625		
V-0 @ 0.2500		
Stock lengths:		
4'-0" (1219 mm),		
8'-0" (2438 mm)		
 Custom lengths available 		
Mechanical fasteners		

Corner Guard designs conform to OSHA, ANSI Life Safety, NFPA, BOCA, UBC, BOMA, ICBO, SBCCI, American Disabilities Act Accessibility Guidelines and all National Building /Code requirements.

JOB NAME:		ITEMS		QUANTITY
JOB NUMBER:		Guard Length:	4 ft.	
CONTRACTOR:	8 ft.			
ARCHITECT:	Custom Size:			
DEALER NAME:		Double-Faced Tape:		
SIGNATURE:	Date:	Undrilled:		