


## AMERICAN FLOOR PRODUCTS COMPANY, INC.

## AFCO-USA

P.O. BOX 7055 • Gaithersburg, Maryland 20898 -7055 • 301-987-0490 • Fax 301-987-0422 email: sales@afco-usa.com • Web Site: www.afco-usa.com

**CUSTOMER P.O. #** 

## SPACE® 2-1/2" x 90° Bull Nose. The Invisible Corner Guard (CG-2145)

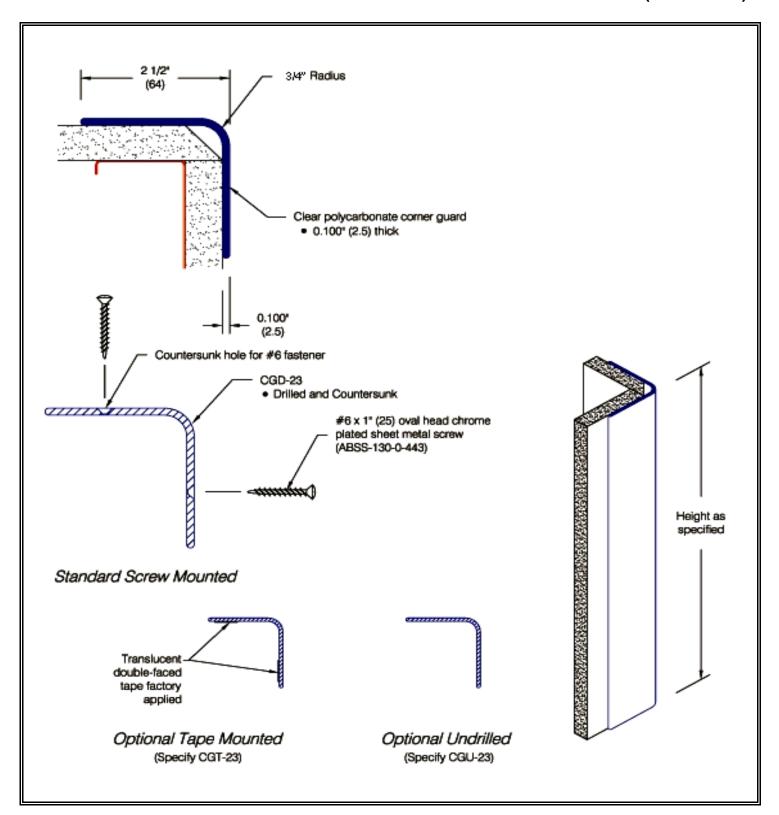

## SPACE® 2-1/2" x 90° Bull Nose. The Invisible Corner Guard (CG-2145)

Mounting	Application	Shock absorbing	Construction	Materials	Fire rating
Surface	High abuse	25.4 ft.lbs/in.	New and	Extruded lexan®	Class A
		ASTM D-256	renovation	Polycarbonate	

Testing in accordance with NFPA 255 (ASTM E 84):

Class A Flame Spread Index: 5

Smoke Developed Index: 185

Features:	Finishes:	Mounting Options:
<ul> <li>Extruded Polycarbonate</li> </ul>	<ul> <li>Clear #132 smooth finish</li> </ul>	<ul> <li>Double-faced tape</li> </ul>
<ul> <li>U/L 94 Flammability</li> </ul>		<ul> <li>Undrilled (fastening method by</li> </ul>
V-2 @ 0.125		others)
V-2 @ 0.0625		
V-0 @ 0.2500		
Stock lengths:		
4'-0" (1219 mm),		
8'-0" (2438 mm)		
<ul> <li>Custom lengths available</li> </ul>		
Mechanical fasteners		

Corner Guard designs conform to OSHA, ANSI Life Safety, NFPA, BOCA, UBC, BOMA, ICBO, SBCCI, American Disabilities Act Accessibility Guidelines and all National Building /Code requirements.

JOB NAME:		ITEMS	ITEMS QUANTITY		
JOB NUMBER:		Guard Length: 4 ft.			
CONTRACTOR:		8 ft.			
ARCHITECT:		Custom Size:			
DEALER NAME:		Double-Faced Tape:			
SIGNATURE:	Date:	Undrilled:			