




# AMERICAN FLOOR PRODUCTS COMPANY, INC.

**AFCO-USA**

P.O. BOX 7055 • Gaithersburg, Maryland 20898 -7055 • 301-987-0490 • Fax 301-987-0422  
email: sales@afco-usa.com • Web Site: www.afco-usa.com

CUSTOMER P.O. #

## VENUS<sup>®</sup> Flush 3" x 90° 2 Hour Fire Rated (CG-2160)

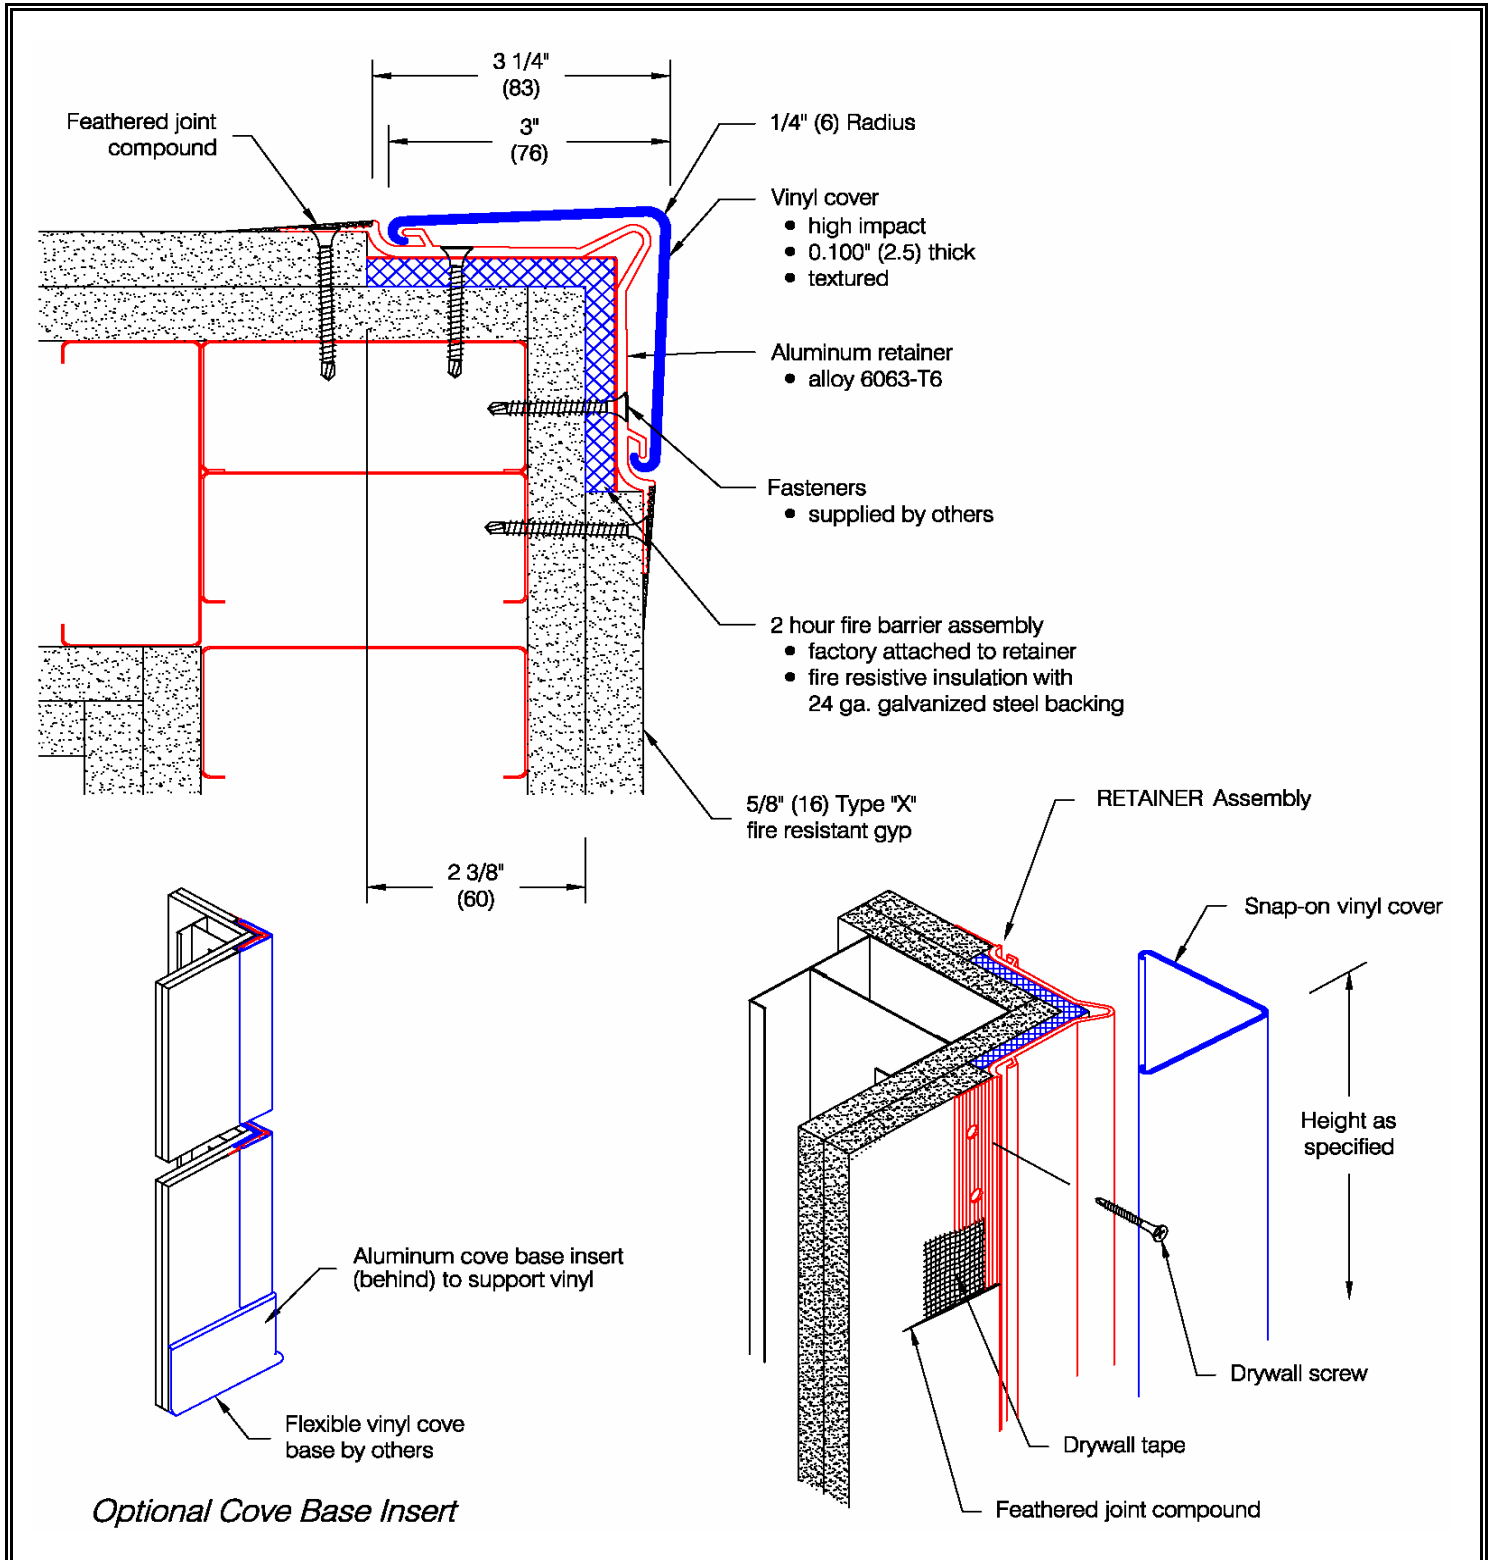

# VENUS<sup>®</sup> Flush 3" x 90° 2 Hour Fire Rated (CG-2160)

Mounting	Application	Shock absorbing	Construction	Materials	Fire rating
Flush	High abuse	25.4 ft.lbs/in. ASTM D-256	New	Vinyl Aluminum	2 hour

Testing in accordance with NFPA 255 (ASTM E 84):

Class A

Flame Spread Index: 5

Smoke Developed Index: 185

<p><b>Features:</b></p> <ul style="list-style-type: none"> <li>• Class A fire rating</li> <li>• Stock lengths: 8'-0" (2438 mm), 9'-0" (2743 mm), 10'-0" (3048 mm), 12'-0" (3658 mm)</li> <li>• Custom cut lengths available</li> <li>• Available with aluminum cove base insert for use with vinyl cove base standard in 4" (102 mm) and 6" (152 mm) heights</li> </ul>	<p><b>Finishes:</b></p> <p>Vinyl cover (textured):</p> <ul style="list-style-type: none"> <li>• Manufacturer's standard colors</li> <li>• Custom colors available</li> </ul> <p>Aluminum retainer:</p> <ul style="list-style-type: none"> <li>• Mill finish aluminum</li> </ul>
---	---

Corner Guard designs conform to OSHA, ANSI Life Safety, NFPA, BOCA, UBC, BOMA, ICBO, SBCCI, American Disabilities Act Accessibility Guidelines and all National Building /Code requirements.

<b>JOB NAME:</b>	<b>ITEMS</b>	<b>QUANTITY</b>
<b>JOB NUMBER:</b>	<b>Guard Length: 8', 9', 10', 12'</b>	
<b>CONTRACTOR:</b>	<b>Color:</b>	
<b>ARCHITECT:</b>	<b>Cove Base Insert:</b>	
<b>DEALER NAME:</b>		
<b>SIGNATURE:</b>	<b>Date:</b>	