


AMERICAN FLOOR PRODUCTS COMPANY, INC.

AFCO-USA

P.O. BOX 7055 • Gaithersburg, Maryland 20898 -7055 • 301-987-0490 • Fax 301-987-0422 email: sales@afco-usa.com • Web Site: www.afco-usa.com



CELESTIAL[®] Column Guard (CG-2237)

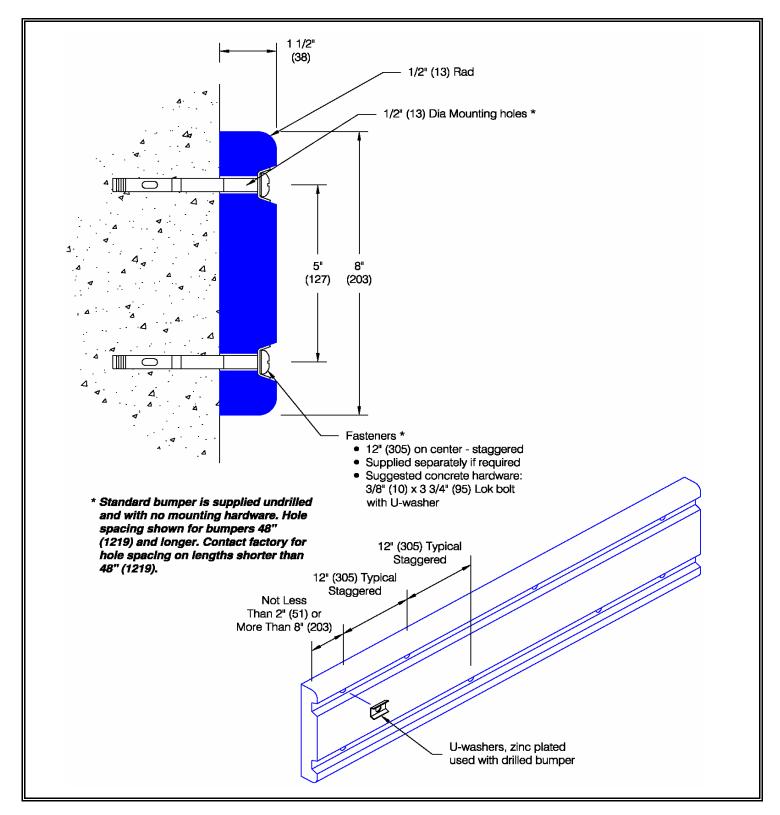

CELESTIAL[®] Column Guard (CG-2237)

Profile	Application	Shock absorbing	ADA Compliance	Materials	Flammability & smoke leveloped (ASTM E84
Flat	5	25.4 ft.lbs/in. ASTM D-256	N/A	EPDM Rubber	N/A

Features:	Optional Features:	
 Extruded EPDM rubber to RMA tolerances 	Drilled for hardware:	
Durometer: (ASTM D-412) 70 ± 5 shore A	Approximately 12" (305 mm) on center	
Tensile strength PSI: (ASTM D-412) 1,750 min.	Spacing from end varies as	
Elongation: (ASTM D-412) 395 min.	restricted by length	
• Tear strength: (ASTM D-624) 229 lbs./in. min.	Custom drilling available	
Impact resistance: (ASTM 2632) 75%		
Low temperature brittleness:		
(ASTM D-746) -40 °F min.	Standard Color:	
• Ozone: (ASTM D-1171) 1,142 hrs @ 102 °F;	(1)Black	
20% strain - no cracks		
• Deflection: (ASTM D-575) 60,000 ft./lbs.		
60,000 ft./lbs 3" (76 mm) with no ruptures		
Stock length:		
12'-0" (3658 mm)		

Corner Guard designs conform to OSHA, ANSI Life Safety, NFPA, BOCA, UBC, BOMA, ICBO, SBCCI, American Disabilities Act Accessibility Guidelines and all National Building /Code requirements.

JOB NAME:		ITEMS	QUANTITY
JOB NUMBER:		Guard Length: 12 ft.	
CONTRACTOR:		Optional Drilling:	
ARCHITECT:		U-Washer:	
DEALER NAME:		Lok Bolt:	
SIGNATURE:	Date:	Number of Bevel End:	