


AMERICAN FLOOR PRODUCTS COMPANY, INC.

AFCO-USA

P.O. BOX 7055 • Gaithersburg, Maryland 20898 -7055 • 301-987-0490 • Fax 301-987-0422 email: sales@afco-usa.com • Web Site: www.afco-usa.com

CUSTOMER P.O.#

POWHATAN® Wall Guard (WG-2181)

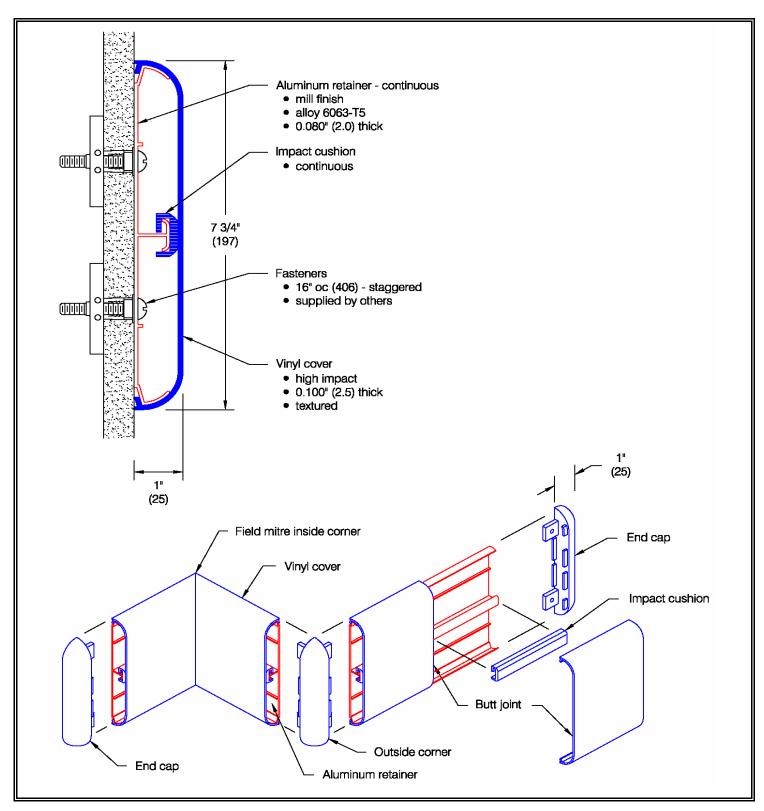

POWHATAN® Wall Guard (WG-2181)

Drofilo	Application	Shock	ADA	Motoriala	Flammability & smoke
Prome	Application	absorbing	Compliance	Materiais	developed (ASTM E-84)
Flat	High abuse	25.4 ft.lbs/in.	Yes	Vinyl	Class A
		ASTM D-256		Aluminum	

			—			_	
Loctina in	accordance	with	NIEDA	255	$I \land Q \top I \land I$		Q M V
169010	Laccondance	VVILLI		Z.).)			() 4 1.

Class A Flame Spread Index: 5

Smoke Developed Index: 185

Features:	Finishes:
Class A fire rating	Manufacturer's standard colors
Molded end caps	Custom colors available
Molded outside corners	
Stock length:	
12'-0" (3658 mm)	
, ,	

Wall Guard designs conform to OSHA, ANSI Life Safety, NFPA, BOCA, UBC, BOMA, ICBO, SBCCI, American Disabilities Act Accessibility Guidelines and all National Building /Code requirements.

JOB NAME:		ITEMS	QUANTITY
JOB NUMBER:		Guard Length: 12 ft.	
CONTRACTOR:		Color:	
ARCHITECT:		End Cap:	
DEALER:		Outside Corner:	
SIGNATURE:	Date:		