




# AMERICAN FLOOR PRODUCTS COMPANY, INC.

**AFCO-USA**

P.O. BOX 7055 • Gaithersburg, Maryland 20898 -7055 • 301-987-0490 • Fax 301-987-0422  
email: sales@afco-usa.com • Web Site: www.afco-usa.com

CUSTOMER P.O. #

## CHICKASAW® Wall Guard (WG-2189) EXT

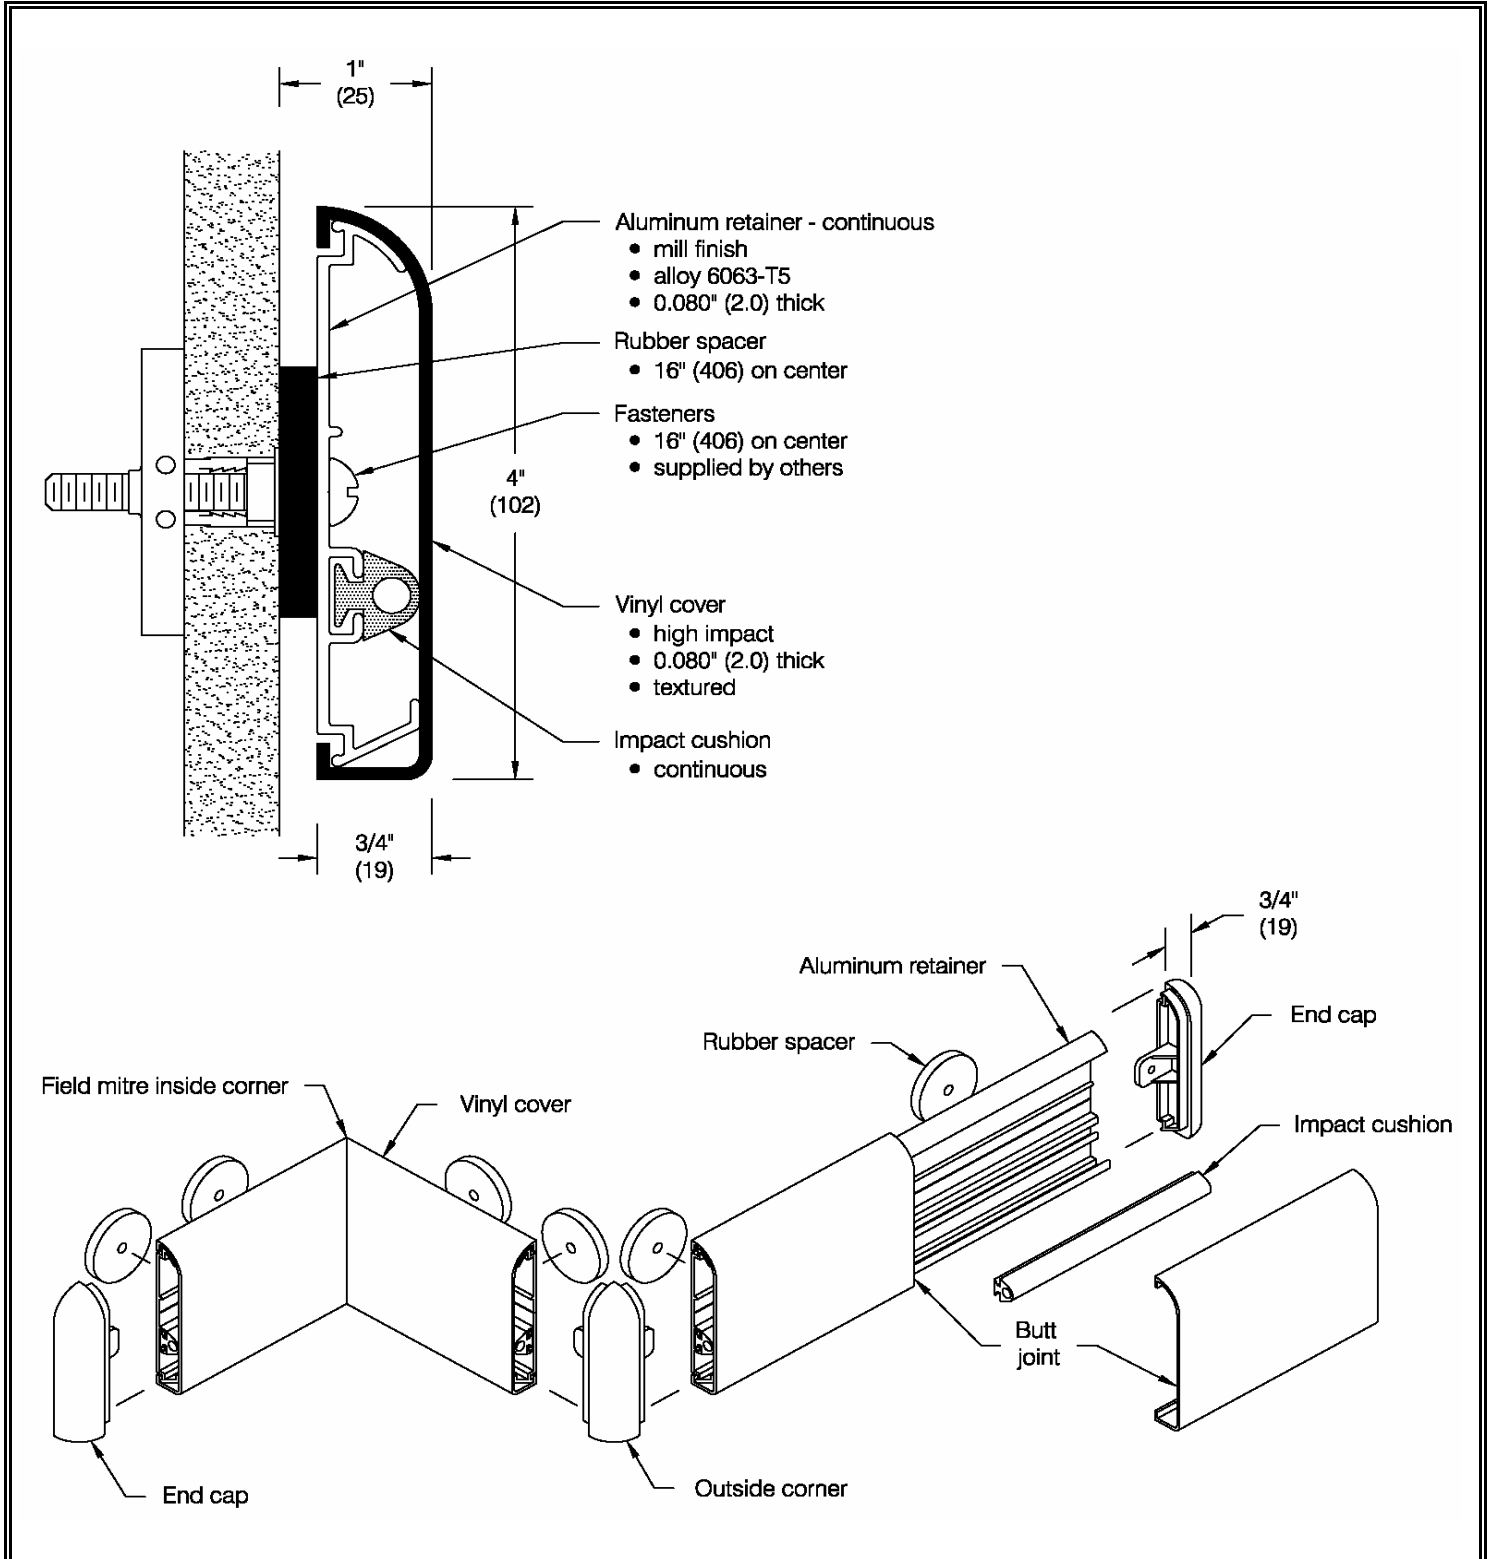

# CHICKASAW® Wall Guard (WG-2189) *EXT*

Profile	Application	Shock absorbing	ADA Compliance	Materials	Flammability & smoke developed (ASTM E-84)
Flat	High abuse	25.4 ft.lbs/in. ASTM D-256	Yes	Vinyl Aluminum	Class A

Testing in accordance with NFPA 255 (ASTM E 84):

Class A

Flame Spread Index: 5

Smoke Developed Index: 185

<p><b>Features:</b></p> <ul style="list-style-type: none"> <li>• Class A fire rating</li> <li>• Molded end caps</li> <li>• Molded outside corners</li> <li>• Stock length: 12'-0" (3658 mm)</li> </ul>	<p><b>Finishes:</b></p> <ul style="list-style-type: none"> <li>• Manufacturer's standard colors</li> <li>• Custom colors available</li> </ul>
--	---

Wall Guard designs conform to OSHA, ANSI Life Safety, NFPA, BOCA, UBC, BOMA, ICBO, SBCCI, American Disabilities Act Accessibility Guidelines and all National Building /Code requirements.

JOB NAME:	ITEMS	QUANTITY
JOB NUMBER:	Guard Length: 12 ft.	
CONTRACTOR:	Color:	
ARCHITECT:	Right End Cap:	
DEALER NAME:	Left End Cap:	
SIGNATURE: _____ Date: _____	Outside Corner:	
	Spacer: (every 16 inches)	