


## AMERICAN FLOOR PRODUCTS COMPANY, INC.

## AFCO-USA

P.O. BOX 7055 • Gaithersburg, Maryland 20898 -7055 • 301-987-0490 • Fax 301-987-0422 email: sales@afco-usa.com • Web Site: www.afco-usa.com

## CUSTOMER P.O. # CHICKASAW<sup>®</sup> Wall Guard - Grooved (WG-2189)

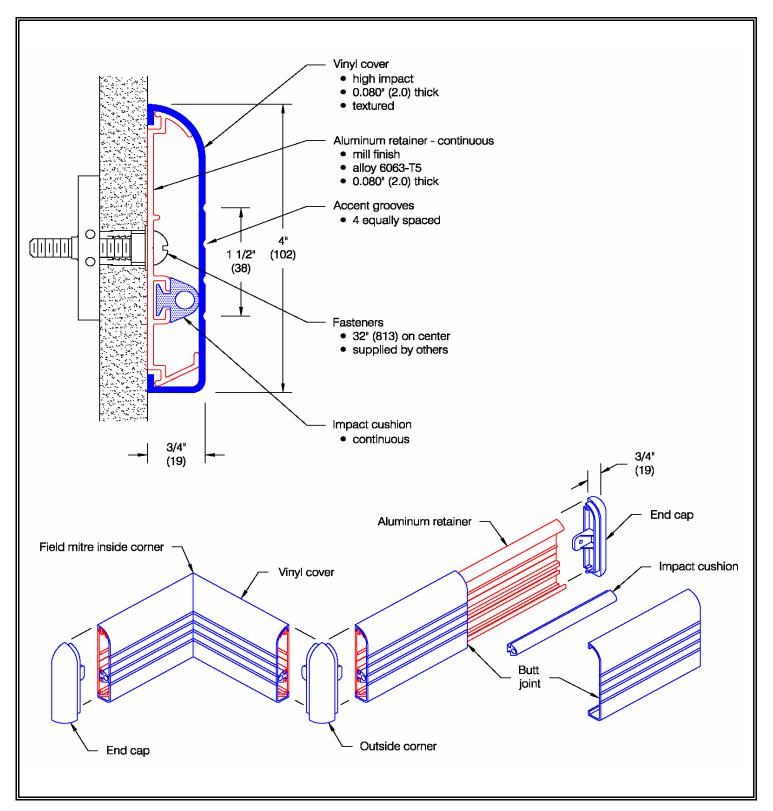

## CHICKASAW<sup>®</sup> Wall Guard - Grooved (WG-2189)

Profile	Application	Shock absorbing	ADA Compliance		Flammability & smoke developed (ASTM E-84)
Flat	High abuse	25.4 ft.lbs/in. ASTM D-256	Yes	Vinyl Aluminum	Class A

Testing in accordance with NFPA 255 (ASTM E 84):

Class A Flame Spread Index: 5 Smoke Developed Index: 185

Features:	Finishes:
Class A fire rating	<ul> <li>Manufacturer's standard colors</li> </ul>
<ul> <li>Molded end caps</li> </ul>	<ul> <li>Custom colors available</li> </ul>
<ul> <li>Molded outside corners</li> </ul>	
Stock length:	
12'-0" (3658 mm)	

Wall Guard designs conform to OSHA, ANSI Life Safety, NFPA, BOCA, UBC, BOMA, ICBO, SBCCI, American Disabilities Act Accessibility Guidelines and all National Building /Code requirements.

JOB NAME:		ITEMS	QUANTITY
JOB NUMBER:		Guard Length: 12 ft.	
CONTRACTOR:		Color:	
ARCHITECT:		Right End Cap:	
DEALER NAME:		Left End Cap:	
SIGNATURE:	Date:	Outside Corner:	