




AMERICAN FLOOR PRODUCTS COMPANY, INC.

AFCO-USA

P.O. BOX 7055 • Gaithersburg, Maryland 20898 -7055 • 301-987-0490 • Fax 301-987-0422
 email: sales@afco-usa.com • Web Site: www.afco-usa.com

CUSTOMER P.O. #

ALGONQUIAN® Wall Guard (WG-2251)

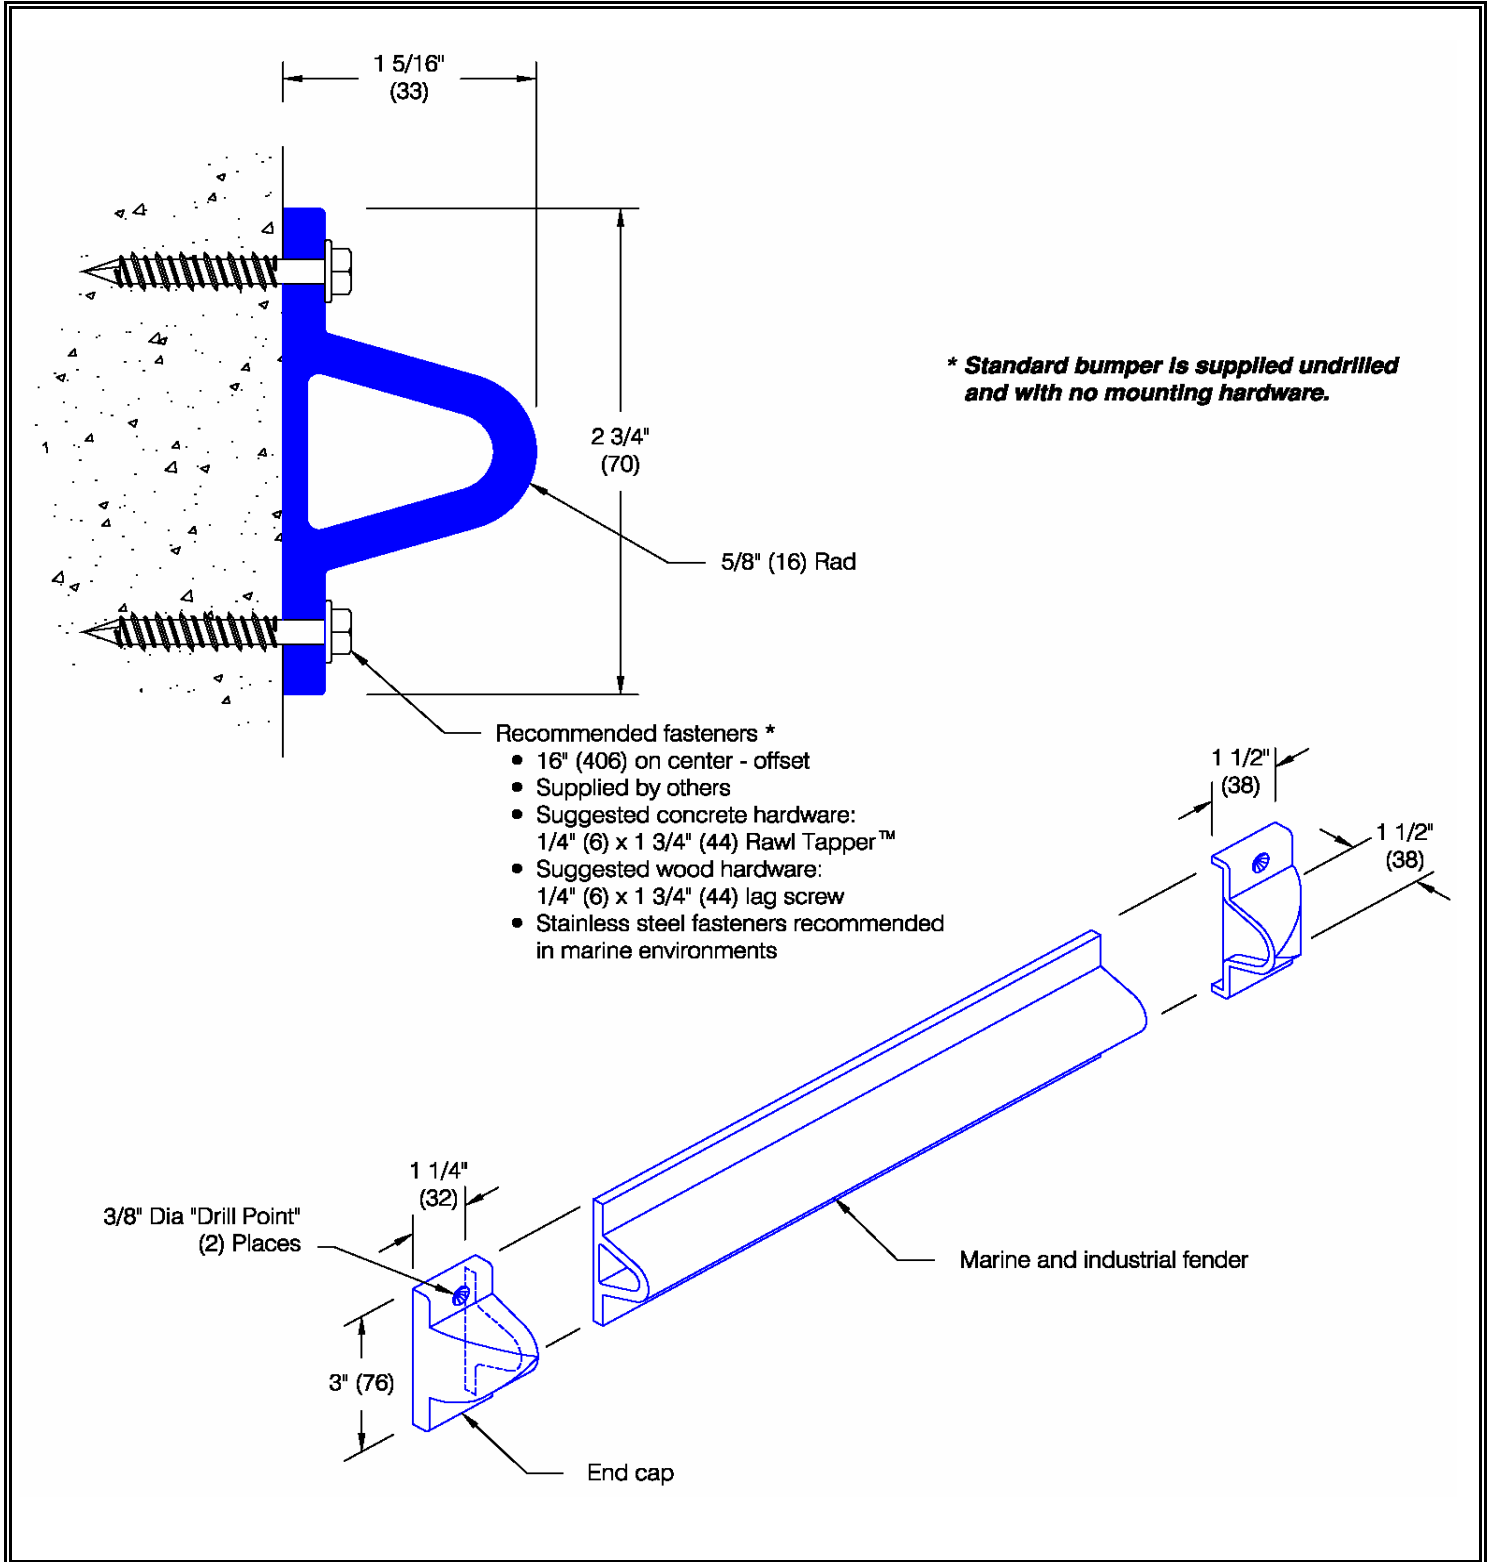

ALGONQUIAN® Wall Guard (WG-2251)

Profile	Application	Shock absorbing	ADA Compliance	Materials	Flammability & smoke developed (ASTM E-84)
Sculpted	High abuse	25.4 ft.lbs/in. ASTM D-256	N/A	Vinyl	N/A

<p>Features:</p> <ul style="list-style-type: none"> • Extruded flexible vinyl to RMA tolerances • Durometer: (ASTM D-2240) 80 ± 3, Shore A • Tensile strength: (ASTM D-412) 2,205 PSI • Elongation: (ASTM D-412) 360% • Specific gravity: (ASTM D-792) 137 ± 0.02 229 lbs./in. min. • Weight: 1.8 lbs./lin. ft. • Stock length: 12'-0" (3658 mm) <p>Optional Features:</p> <ul style="list-style-type: none"> • Urethane end cap (Black only) 	<p>Standard Colors:</p> <ul style="list-style-type: none"> (01)Black (03)Tan (04)Brown (05)Gray (10)White (70)Safety Yellow
---	--

Bumper designs conform to OSHA, ANSI Life Safety, NFPA, BOCA, UBC, BOMA, ICBO, SBCCI, American Disabilities Act Accessibility Guidelines and all National Building /Code requirements.

JOB NAME:	ITEMS	QUANTITY
JOB NUMBER:	Bumper Length:	
CONTRACTOR:	Lok Bolt:	
ARCHITECT:	Drilling Pattern:	
DEALER NAME:		
SIGNATURE:	Date:	